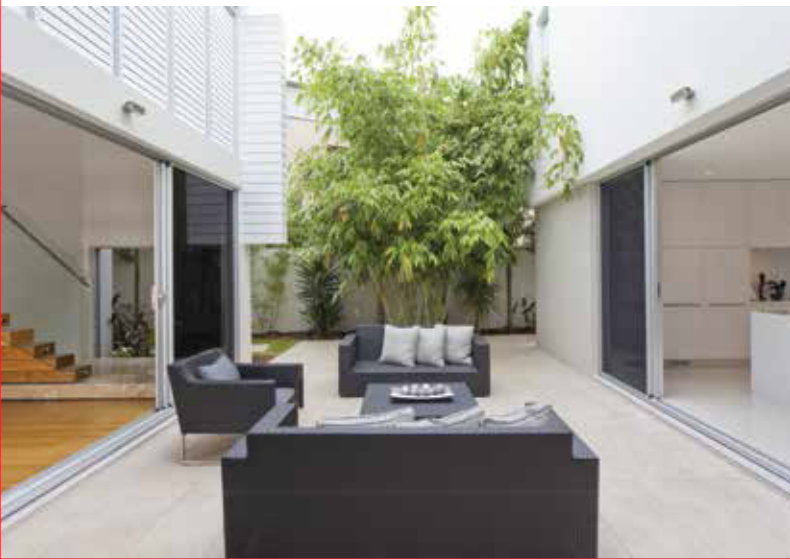# aba

DISCLAIMER

The technical details, recommendations and other information contained in the datasheets are given in good faith and represent the best of our knowledge and experience at the time of printing. It is your responsibility to ensure that our products are used and handled correctly and in accordance with any applicable standard, our instructions and recommendations and only for the uses they are intended. We also reserve the right to update information without prior notice to you to reflect our ongoing research and development program.

ABA Products manufactured by
ARDEX SINGAPORE PTE LTD
26 Tuas Ave 4, Singapore 639376
Email: enquiries@aba-sea.com
Web: www.aba-sea.com

ABA Technical Services Hotline: +65 6861 7700

TILE ADHESIVES

ABA FLOOR AND WALL TILE ADHESIVE

DESCRIPTION
FLOOR AND WALL TILE ADHESIVE is a cement-based ceramic tile adhesive for the fixing of ceramic tiles to cement-rendered walls, concrete or sand/cement topped floors.

TILE TYPES
Quarry tiles, slate and ceramic tiles (>6% moisture absorption).

APPLICATION
For internal and external use. For floors and walls.

COVERAGE
3kg cover approx. 1m² (6x6x6 notched trowel)

PACKAGING
25kg

INTERNAL AND EXTERNAL USE | FOR WALLS AND FLOORS | FOR MANY SUBSTRATES

ABA READY-MIXED WALL TILE ADHESIVE

DESCRIPTION
READY-MIXED WALL TILE ADHESIVE is a white-coloured adhesive paste.

APPLICATION
For internal use.

USE
To fix tiles and mosaics on walls and ceilings.
To install polystyrene boards and insulation panels.

COVERAGE
• Mosaics: approx. 1.5kg / m²
• Normal size tiles: approx. 2-3kg / m²

PACKAGING
5L

NO MIXING | FLEXIBLE | NON SLUMP | FOR INTERNAL WALLS

GROUTS

ABA COLOURED AND WHITE GROUT

DESCRIPTION
COLOURED GROUT is a fine, non-sanded, cement-based grout.

APPLICATION
For internal and external use. For walls and floors.

JOINT WIDTHS
1mm to 4mm

TILE TYPES
• Ceramic tiles
• Mosaics
• Non-moisture sensitive stones

COLOURS
See below

PACKAGING
1kg

INTERNAL AND EXTERNAL USE | FOR WALLS AND FLOORS | JOINTS FROM 1-4MM

In 18 different colours matching tile surface colours and textures.

NOTE: This is a rendering of the grout colour samples and is meant as an approximate guide.

▲ 282 Alabaster	▲ 288 Macchiato	▲ 216 Sandalwood
▲ 229 Buff	▲ 273 Magellan Grey	▲ 211 Slate Grey
▲ 287 Charred Ash	▲ 202 Midnight	▲ 227 Todd River Sand
▲ 250 French Vanilla	▲ 241 Misty Grey	▲ 277 Travertine
▲ 280 Havana	▲ 210 Mocha	▲ 248 Walnut
▲ 249 Light Beige	▲ 285 Mudberry	▲ 200 White

---

aba

PRODUCT RANGE

• **Primers** • **Waterproofing**
• **Construction & Repair**
• **Flooring Adhesives**
• **Tile Adhesives** • **Grouts**

ABOUT ABA

The ABA brand was founded in Australia to solve issues and make installation of tiles faster and easier, being the most recognised brand of tile installation solutions over the past 50 years.

In Southeast Asia, ABA offers a comprehensive range of adhesive and under tile waterproofing solutions targeting traditional retail, timber merchants and modern hardware channels - with a brilliant reputation of over 30 years. With the new range, ABA will serve the recent market trends and needs for the retail business.

ABA prides itself on offering product solutions that combine technical quality with exceptional ease of use, whatever the project. Smaller packaging sizes and detailed product application guidelines serve the requirements of both small contractors and DIY end customers.

Backed by over 68 years' experience and supported by the global resources of the ARDEX Group, ABA is committed to continuous product innovation and development programmes.is always welcome and will help us grow this brand well into the future.

ABA ON THE MOVE

ABA's mobile website is great for when you're on the move:
• Product Selection
• Datasheets
• Application Tips & Tricks

Check out the mobile site at www.aba-sea.com

FACEBOOK

Stay in touch with us on Facebook:
• Product news & updates
• Introduction of new products

facebook.com/abaSoutheastAsia

ABA MULTIPURPOSE PRIMER AND ADDITIVE

DESCRIPTION
MULTIPURPOSE PRIMER AND ADDITIVE is designed to improve the shear and tensile bond of sand / cement screeds, plasters, render mortars and tile adhesives.

APPLICATION
With roller, brush or flat trowel.

COVERAGE
5L cover approx.:
• Render coat: 10m^2 @thickness of 10mm
• Screed: 9m^2 @thickness of 15mm

PACKAGING
5L

HIGH BOND STRENGTH | QUICK DRYING

FLOORING ADHESIVE

ABA VINYL AND CARPET TILE ADHESIVE

DESCRIPTION
VINYL AND CARPET TILE ADHESIVE is a water-based acrylic adhesive. Without hazardous organic solvents and long working time.

APPLICATION
For internal use.

FLOOR COVERINGS
• Vinyl composition tiles
• Vinyl-backed carpet tiles
• Dual bond carpet pad underlay

COLOUR
Off-white, transparent when dry

COVERAGE
1L covers approx. 5-7m^2

PACKAGING
5L

LOW VOC | QUICK DRYING

EXCELLENT COVERAGE

ABA PATCH AND PLUG

DESCRIPTION
PATCH AND PLUG is a quick setting hydraulic cement. Whether water is pouring in under pressure or seeping in as a slow leak, the flow stops immediately when it is pressed into the hole or crack.

APPLICATION
For internal and external use.

USE
• Instantly stops water leakage
• Plug and seal construction holes
• Prevent seepage sound pipes
• Anchor bolts, dowel bars

MIXING
3.5 parts powder: 1 part water by weight

PACKAGING
1kg and 5kg

INTERNAL AND EXTERNAL USE | QUICK DRYING

ABA RAPIDSET REPAIR MORTAR

DESCRIPTION
RAPIDSET REPAIR MORTAR is a rapid hardening, rapid drying, and slump-free mortar. Ideal for repairing and resurfacing concrete stair treads and concrete subfloors.

APPLICATION
For internal and external use.

COVERAGE
Approx. 1.4kg powder / mm / m^2

PACKAGING
3kg, 4x3kg per box

INTERNAL AND EXTERNAL USE | QUICK DRYING

HIGH BOND STRENGTH

ABA UNDERTILE WATERPROOFING

DESCRIPTION
UNDERTILE WATERPROOFING is a tough, ready to use waterproofing membrane specifically designed to use under tiles in wet areas.

SUBSTRATES
Concrete, metal, wood, fibre-cement sheets and plaster boards.

APPLICATION
For internal use.

COVERAGE
5L cover approx. 5-7m^2 for 2 coats

PACKAGING
5L

IMPROVED EXTRA FLEX | LOW VOC

QUICK DRYING | NO MIXING

ABA DAMP PROOF MEMBRANE

DESCRIPTION
DAMP-PROOF MEMBRANE is a two-component water-based epoxy polyamide membrane / barrier coating. Preventing rising damp and efflorescence.

APPLICATION
For internal and external use.

COVERAGE
1L covers approx. 1.5m^2 (2 coats)

PACKAGING
4L set (2x2L)

HIGHLY FLEXIBLE | 7 DAYS GREEN SCREED

INCREASED HEAT & MOISTURE RESISTANCE